

FIBREGLASS WARNING INTEGRATED TACTILE (300X600MM) (YELLOW)

P5
GRIP

PRODUCT CODE: AT 224FY

RANGE	Integrated Tactile
DESIGN	Fibreglass Warning
MATERIAL	Reinforced Fibreglass
LOCATION	Indoor or Outdoor
DIMENSIONS	H300 x W600mm

FEATURES & BENEFITS


- Moulded from hard wearing, reinforced fibreglass as a complete uniform integrated warning tactile
- Complies with the NCC [D4D9 Tactile Indicators] and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Made in Australia

SLIP RESISTANCE TESTING


- Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.
- | | |
|---------------|---------------------------------------|
| TEST | AS 4586 APPENDIX A: Wet Pendulum Test |
| TRL 55 SLIDER | = 63 CLASS = P5 |

LUMINANCE TESTING

- Important information: To determine a luminance contrast between a substrate and the AT TGSI, see: AS/NZS 1428.4.1:2009.
- | | |
|-------------------------------|---|
| TEST | AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3 |
| LIGHT REFLECTANCE VALUE / WET | = 59.51 |
| LIGHT REFLECTANCE VALUE / DRY | = 59.53 |

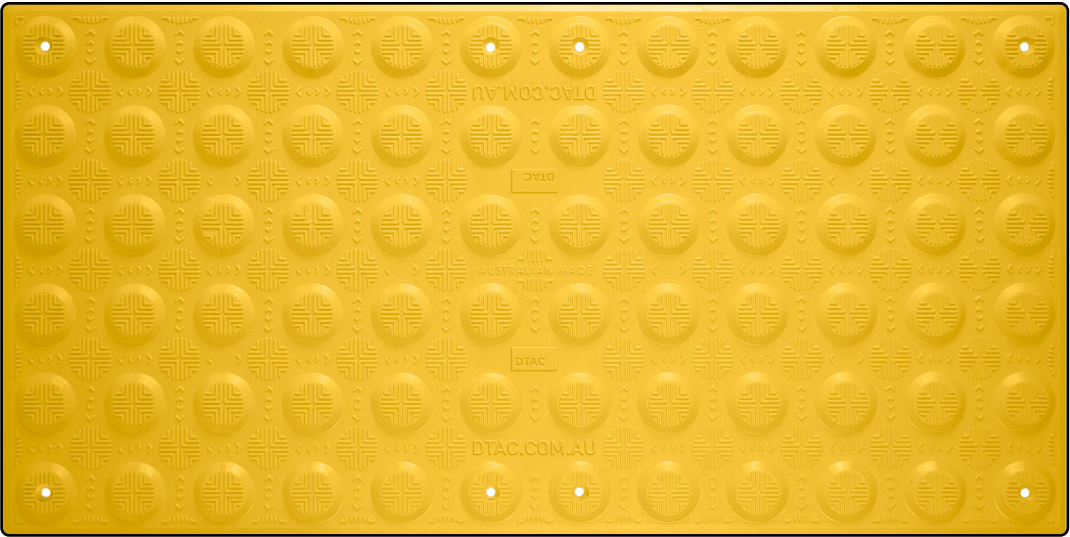

SUBSTRATE Stone / Masonry / Timber / Vinyl

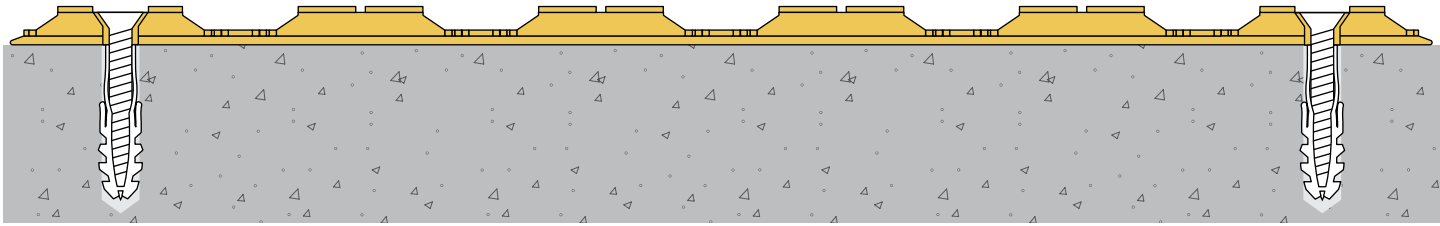

CODE AT 224FY

FIXING Drill, screw and adhesive (Screws and plugs supplied)

NOTE Installed on top of or installed in an existing recess made to suit the tile size.