
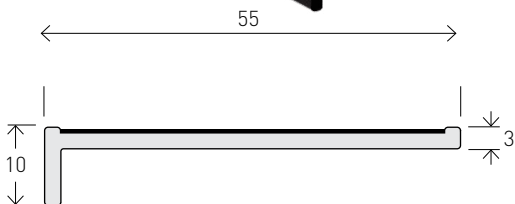


SUEDE EDGING 10X55X3MM

PRODUCT CODES: DESCRIPTION:

**P5
GRIP**

AT-SN 07	NATURAL ANODISED Silicon carbide tape
AT-SN 08	BLACK ANODISED Silicon carbide tape
RANGE	Stair Nosing & Edging
DESIGN	Suede
MATERIAL	6063 T5 extruded aluminium alloy with silicon carbide insert
LOCATION	Indoor

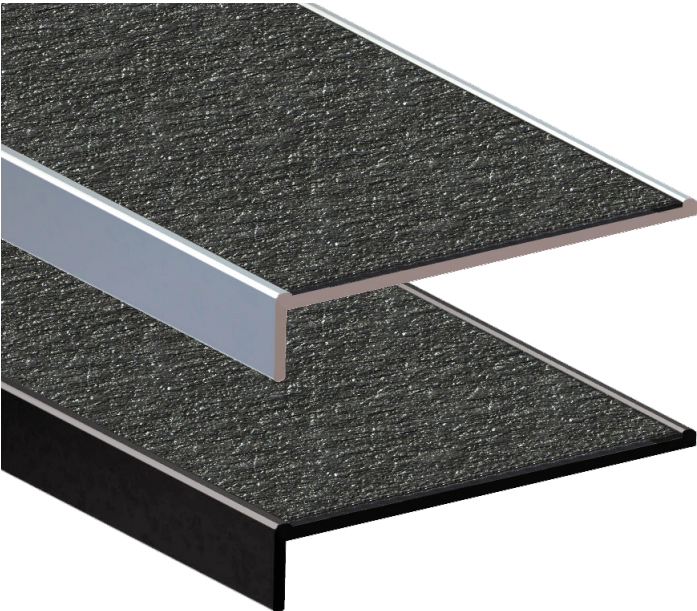

CODE	AT-SN 07
SIZE	H10 x W55 x T3 - L3200mm

FEATURES & BENEFITS

Extruded continuous band of hard wearing silicon carbide inserted into cavities designed in Australia

Available in exclusive premium quality flat, angle or carpet profiles

Suitable for all stable finished indoor surfaces and substrates only. Not suitable for external or wet areas.

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= 78 CLASS = P5
TRL 55 SLIDER	= 96 CLASS = P5
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= 1.05 CLASS = D1
TEST	AS 4586 APPENDIX C: Wet/Barefoot Ramp Test
MEAN ANGLE OF INCLINATION	= > 35° CLASS = C
TEST	AS 4586 APPENDIX D: Oil/Wet Ramp Test
CORRECTED MEAN OVERALL ACCEPTANCE ANGLE	= > 35° CLASS = R13

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the AT EDGING, see: AS 1428.1:2009.

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
NATURAL	
LIGHT REFLECTANCE VALUE / WET	= 2.23
LIGHT REFLECTANCE VALUE / DRY	= 2.62
BLACK	
LIGHT REFLECTANCE VALUE / WET	= 2.23
LIGHT REFLECTANCE VALUE / DRY	= 2.62



CODE	AT-SN 08
SIZE	H10 x W55 x T3 - L3200mm