

SILICON CARBIDE EDGING 10x70x3mm



PRODUCT CODES: **DESCRIPTION:**

AT-SN 11 **BLACK**

RANGE Stair Nosing & Edging

DESIGN Industrial

MATERIAL Fibre Glass Reinforced Polymer

LOCATION Indoor or outdoor

FEATURES & BENEFITS

Continuous band of hard wearing, fibre glass reinforced polymer extrusion

Available in exclusive premium quality angle profiles

Suitable for all stable finished outdoor or indoor surfaces and substrates

Complies with the NCC (D4D4 Parts of buildings to be accessible) where stated and Disability (Access to Premises—Buildings) Standards to meet the deemed-to-satisfy-provisions

Complies with slip resistance requirements as detailed in HB 198

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = 72 **CLASS** = P5


LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the AT EDGING, see: AS 1428.1:2009.

TEST AS 1428.1 APPENDIX B PARAGRAPH B3

LIGHT REFLECTANCE VALUE / WET = 3.39

LIGHT REFLECTANCE VALUE / DRY = 2.94

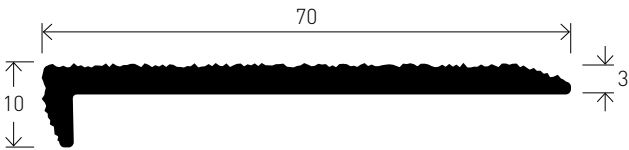

CODE AT-SN 11

SIZE H10 x W70 x T3 - L3200mm