

FIBREGLASS WARNING INTEGRATED TACTILE (300X600MM) (BLACK)



PRODUCT CODE: AT 223FB

RANGE	Integrated Tactile
DESIGN	Fibreglass Warning
MATERIAL	Reinforced Fibreglass
LOCATION	Indoor or Outdoor
DIMENSIONS	H300 x W600mm

FEATURES & BENEFITS

- Moulded from hard wearing, reinforced fibreglass as a complete uniform integrated warning tactile
- Complies with the NCC [D4D9 Tactile Indicators] and Disability (Access to Premises—Buildings) standards to meet the deemed-to-satisfy-provisions
- Complies with slip resistance requirements as detailed in HB 198
- Made in Australia

SLIP RESISTANCE TESTING


Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 198 (HB 198), a Guide to the specification and testing of slip resistance of pedestrian surfaces. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
TRL 55 SLIDER	= 63 CLASS = P5


LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the AT TGSI, see: AS/NZS 1428.4.1:2009.

TEST	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LIGHT REFLECTANCE VALUE / WET	= 3.09
LIGHT REFLECTANCE VALUE / DRY	= 3.56

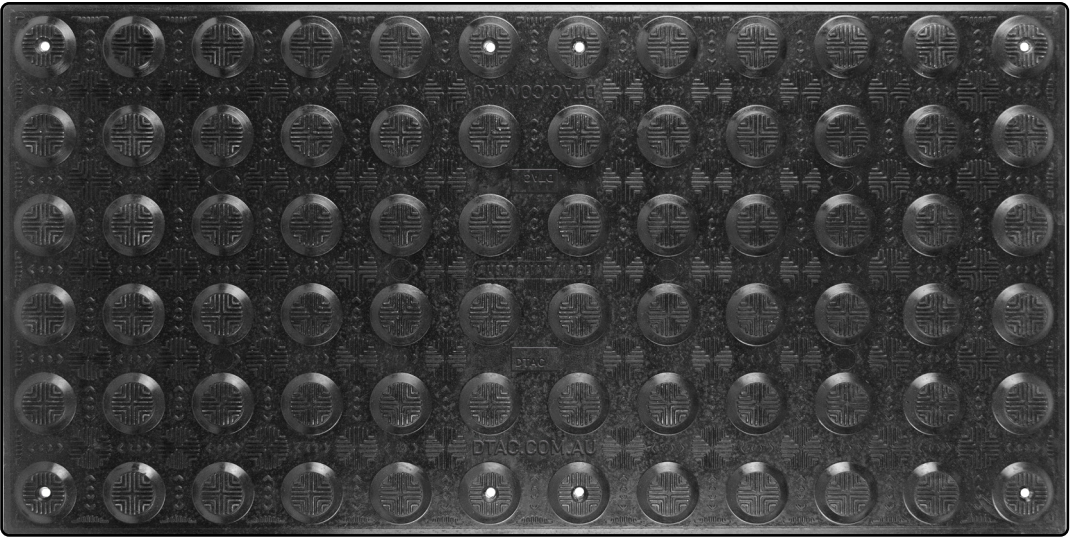

SUBSTRATE Stone / Masonry / Timber / Vinyl

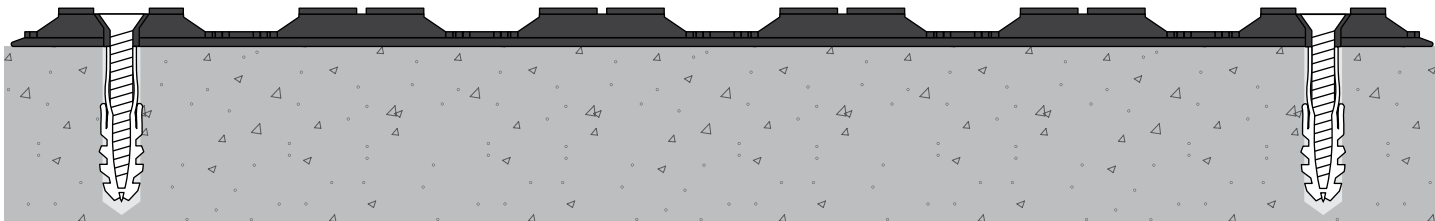

CODE AT 223FB

FIXING Drill, screw and adhesive (Screws and plugs supplied)

NOTE *Installed on top of or installed in an existing recess made to suit the tile size.*